



## Fitur :

1. Dua fungsi : TIG dan MMA.
2. Kinerja tinggi.
3. Jangkauan luas untuk voltase input:  
220V  $\pm$  15%.
4. Portabel dan mudah dioperasikan.



## Aplikasi :

- Dekorasi
- Pabrik kecil dan menengah
- Pipa & tabung bertekanan tinggi
- Konstruksi

## Spesifikasi :

<b>V<sub>IN</sub></b> Input Voltage AC220 V $\pm$ 15% 1PH	<b>Input Frequency</b> 50/60	<b>A<sub>IN</sub></b> Rated Input Current TIG: 28.2A MMA: 43.6A	<b>P1 Input Power</b> TIG: 6.2KVA MMA: 9.6KVA	<b>I<sub>2</sub> Current range</b> 10-200 A	<b>V<sub>o</sub></b> Max No Load Voltage 56 V	<b>DUTY CYCLE</b> 60%	<b>Arc-Initiating (TIG)</b> H-F
<b><math>\eta</math></b> Efficiency 80%	<b><math>\phi</math></b> Power Factor 0.73	<b>IP Protection Class</b> IP21	<b>Weight</b> 9 kg	<b>Dimensions</b> 395x153x301 (mm)			


## Aksesoris Standar :



TIG-26 4m



300A+16mm<sup>2</sup>x3m

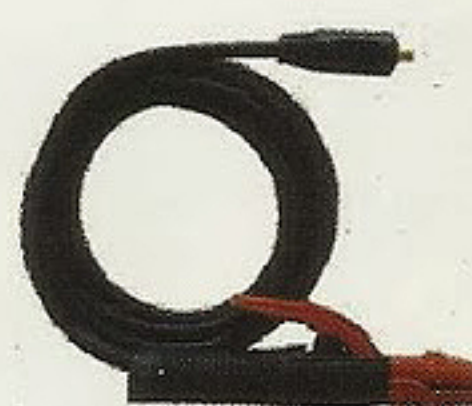

200A+16mm<sup>2</sup>x3m